© Copyright 2019 ABB. All rights reserved.


ABB India Limited
ELDS-Nashik

36 kV VACUUM CIRCUIT BREAKER

CUSTOMER: OYSTER GREEN HYBRID THREE PRIVATE LIMITED
CUSTOMER PO. NO.: EP-1068/PO/MAT/0029/2025 Dtd. 25.03.2026
ABB REF. NO.: 4203265543 BREAKER QUANTITY : 14 Nos

TECHNICAL DETAILS:

STANDARD	IEC62271-100
HIGHER SYSTEM VOLTAGE	36 kV
SERVICE VOLTAGE	33kV
RATED CURRENT	1250A
RATED FREQUENCY	50 Hz
BASIC INSULATION LEVEL	70 kV / 170 kV pk
SHORT CIRCUIT BREAKING CURRENT	25 kA / 3 sec
SHORT CIRCUIT MAKING CURRENT	62.5 kA pk
MINIMUM CREEPAGE	900mm
CONTROL VOLTAGE	220 V DC
SPRING CHARGE MOTOR SUPPLY VOLTAGE	230 V AC
AUXILIARY SUPPLY VOLTAGE	230 V AC
PAINT SHADE	631 Of IS 5 (Light Grey)
ENCLOSURE FABRICATION MATERIAL TYPE	MS
ENCLOSURE FABRICATION MATERIAL THICKNESS	2.5 mm
SUPPORT STRUCTURE TYPE	CB Structure -600mm plinth
TERMINAL CONNECTOR (REQD. IF ANY)	Not in INABB Scope
MECHANISM TYPE	SPRING CHARGE (EL3)

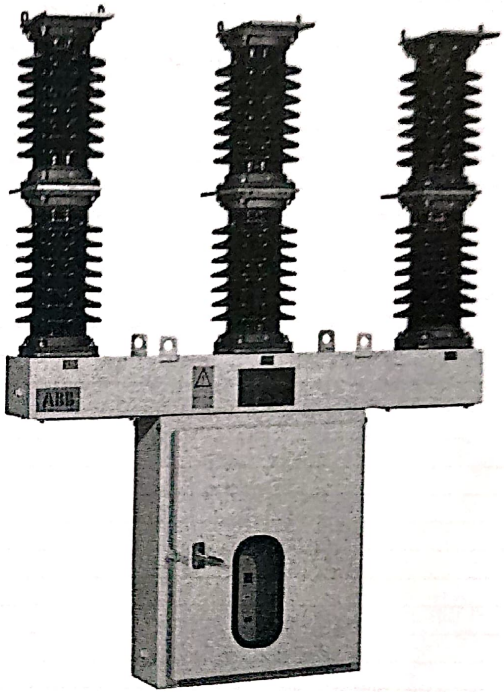

NOTE: PICTURE IS FOR REFERENCE ONLY. ACTUAL PRODUCT MAY VARY AS PER CONFIGURATION.

During the installation, commissioning period and the time of operation, client is obliged to follow all instructions and recommendation given by manufacturers of individual instruments installed inside supplied equipment

Based on			Prepared SH	Date 02/04/2026	Title COMMON DRAWINGS PROJECT TITLE PAGE	Order No 4203265543	= K00
			Checked VDR	Approved SRM			+
			Customer: FICHTNER CONSULTING ENGINEERS (INDIA) PVT LTD	Project name 350MW HYBRID PROJECT 220/33kV POOLING SUBSTATION - KANASIYA, MP		Doc. No.	Lang.
			Contractor / Contract No. KSHEMA POWER INDIA PVT LTD		ABB India Ltd., Nashik, ELDS		Page A00
Rev. Code	Date	Name					Pages 1

© Copyright 2019 ABB. All rights reserved.

CB OPEN, SPRING NOT CHARGED

SPRING CHARGING MOTOR

MOTOR AC SUPPLY
230 V AC

-XDB 101 -XDB 102

H1 H2

-FCM1
4A
MCB SPRING CHARGING MOTOR

AC FAIL CONTACT

M1 M2

-MS
230 VAC
SPRING CHARGE MOTOR

-BS2

-MS
230 VAC

ILLUMINATION CIRCUIT

SPACE HEATER

POWER SUPPLY
(3 PIN SOCKET)

AUXILIARY CIRCUIT AC SUPPLY
230 V AC

-XDB 103 -XDB 104

H3 H4

-FCM3
10A
MCB MAIN AC

AC FAIL CONTACT

H5 H5 H5

-SFC1
250 VAC, 0.25A
DOOR INTERLOCK SWITCH

-SFC6
10A,240VAC
HEATER TOGGLE SWITCH

-SFC7
10A,240VAC
3 PIN SOCKET TOGGLE SWITCH

H6 H8 H10

-BT1
220VAC,50Hz
THERMOSTAT

H9

-EA1
240VAC,50Hz
ILUMINATION LAMP

-EB1
240 VAC 100W
CUBICLE SPACE HEATER


-XDS1
6A
POWER SUPPLY
3PIN SOCKET

-XG1
H90 PE14

H7 H7

Based on			Prepared SH	Date 02/04/2026	Title	Order No	= H01
		Customer: FICHTNER CONSULTING ENGINEERS (INDIA) PVT LTD	Checked VDR	Approved SRM	OUTDOOR VACUUM CIRCUIT BREAKER AC SUPPLY CIRCUITS	4203265543	+ LV
		Contractor / Contract No.	Project name			Doc. No.	Lang.
Rev. Code	Date	Name KSHEMA POWER INDIA PVT LTD	350MW HYBRID PROJECT 220/33kV POOLING SUBSTATION - KANASIYA, MP		ABB India Ltd., Nashik, ELDS	YN1V300013-xxx	Page 2 / Pages 7

© Copyright 2019 ABB. All rights reserved.

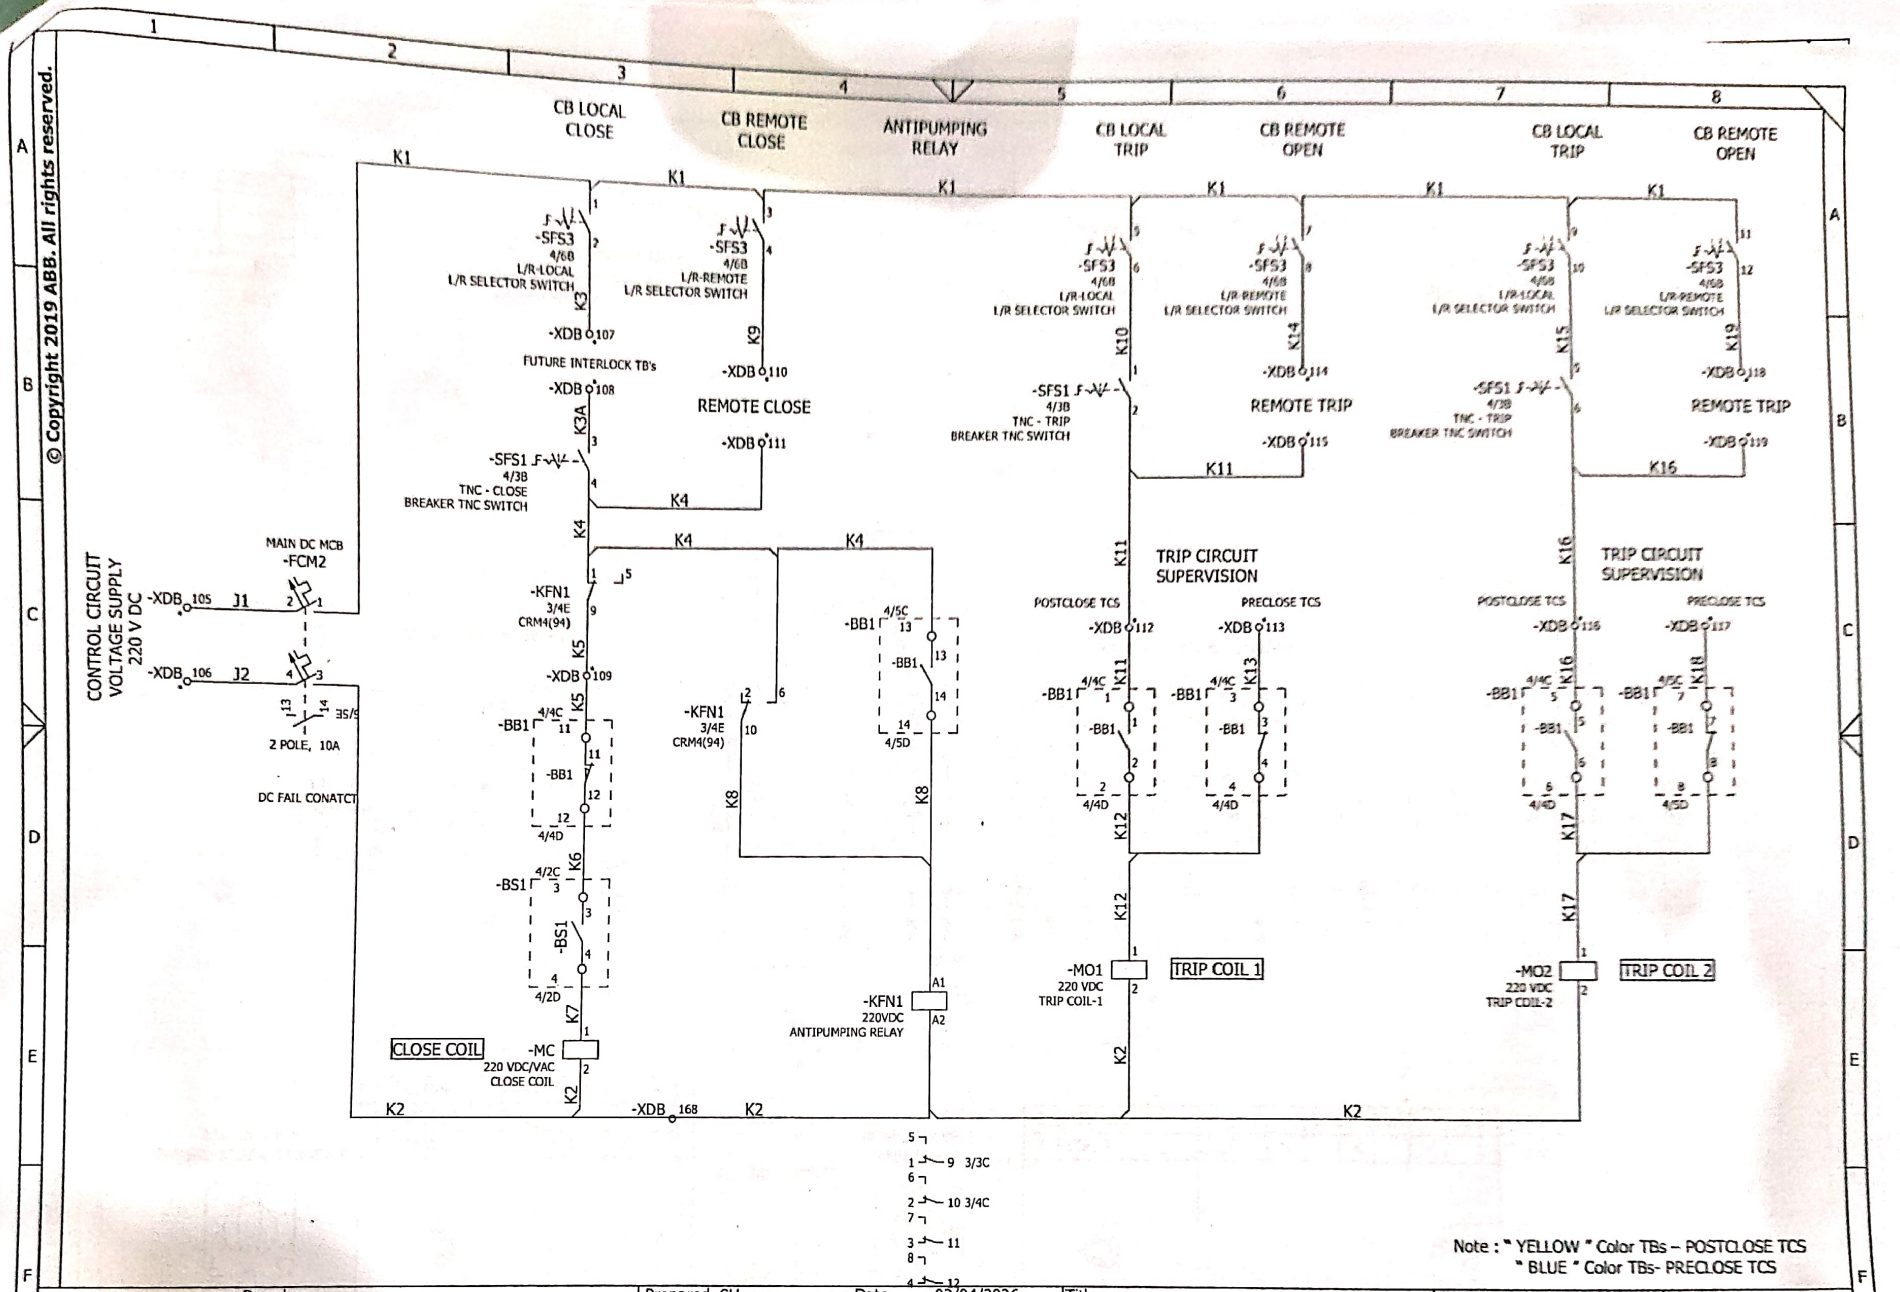


Based on			Prepared SH	Date 02/04/2026	Title	Order No	= H01
Customer: FICHTNER CONSULTING ENGINEERS (INDIA) PVT LTD			Checked VDR	Approved SRM	OUTDOOR VACUUM CIRCUIT BREAKER CONTROL CIRCUIT	4203265543	+ LV
Contractor / Contract No. KSHEMA POWER INDIA PVT LTD			Project name 350MW HYBRID PROJECT 220/33kV POOLING SUBSTATION - KANASIYA, MP		ABB India Ltd., Nashik, ELDS	Doc. No. YN1V300013-xxx	Lang. / Page 3 / Pages 7
Rev. Code	Date	Name					

© Copyright 2019 ABB. All rights reserved.

CB OPEN, SPRING NOT CHARGED

-XDB = BREAKER INTERNAL TERMINAL

TRIP-NEUTRAL-CLOSE SELECTOR SWITCH



SPRING-RETURN HANDLE
PISTOL GRIP


-SFS1
TNC SELECTOR SWITCH






1	TRIP		X		X
2	NEUTRAL				
3	CLOSE			X	


LOCAL/REMOTE SELECTOR SWITCH




WING TYPE
NON-LOCKABLE

-SFS3
L/R SELECTOR SWITCH






1	LOCAL	X		X		X		X	
2	REMOTE		X		X		X		X

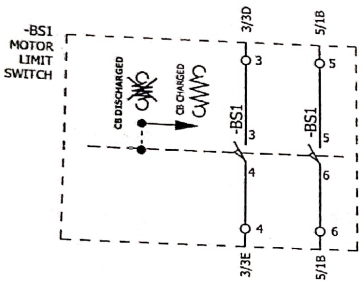


LIMIT SWITCH OF THE SPRING CHARGING MOTOR

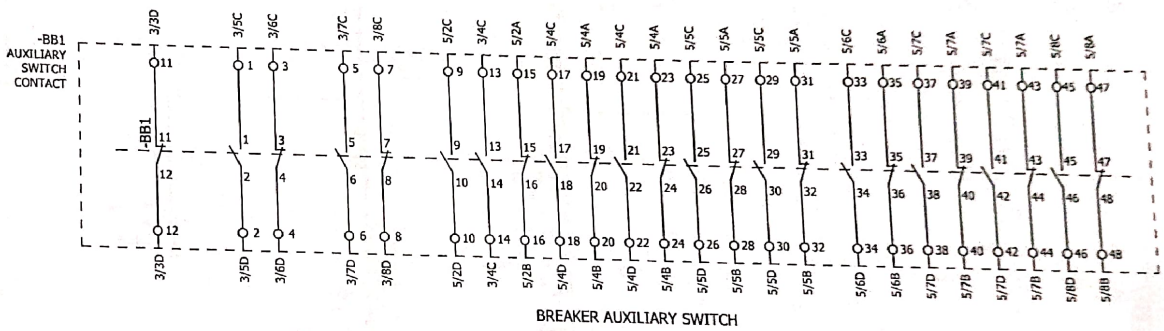



BREAKER AUXILIARY SWITCH

Rev. Code	Date	Name	Based on	Prepared SH	Date 02/04/2026	Title	Order No	= H01
			Customer: FICHTNER CONSULTING ENGINEERS (INDIA) PVT. LTD	Checked VDR	Approved SRM	OUTDOOR VACUUM CIRCUIT BREAKER SWITCH DETAILS	4203265543	+ LV
			Contractor / Contract No. KSHEMA POWER INDIA PVT LTD	Project name 350MW HYBRID PROJECT 220/33kV POOLING SUBSTATION - KANASIYA, MP		ABB India Ltd., Nashik, ELDS	Doc. No. YN1V300013-xxx	Lang. Page 4 Pages 7

© Copyright 2019 ABB. All rights reserved.

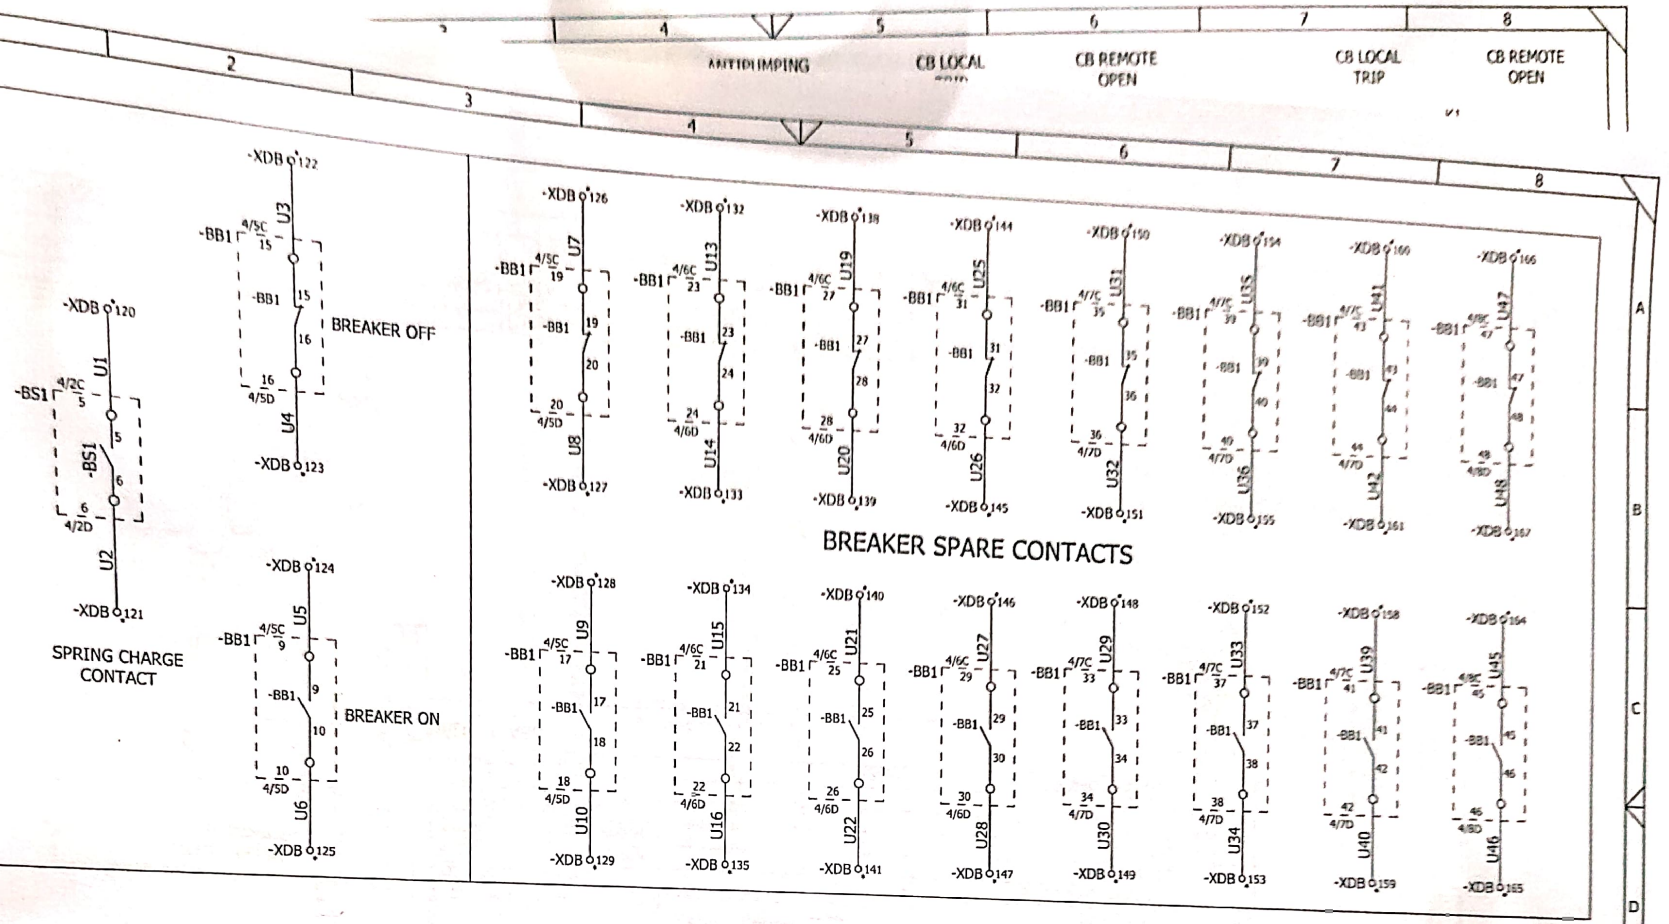


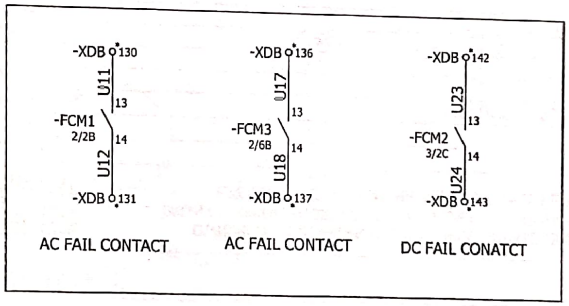

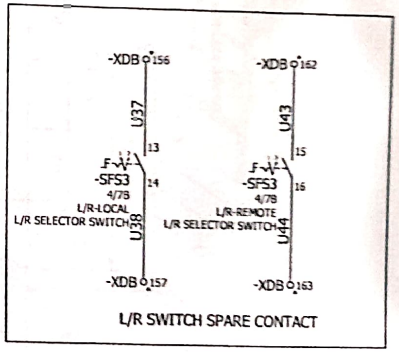

Based on			Prepared SH	Date 02/04/2026	Title OUTDOOR VACUUM CIRCUIT BREAKER SPARE CONTACTS	Order No 4203265543	= H01
			Checked VDR	Approved SRM			+ LV
			Customer: FICHTNER CONSULTING ENGINEERS (INDIA) PVT LTD	Project name 350MW HYBRID PROJECT 220/33kV POOLING SUBSTATION - KANASIYA, MP	ABB India Ltd., Nashik, ELDS	Doc. No. YN1V300013-xxx	Lang.
Rev. Code	Date	Name	Contractor / Contract No. KSHEMA POWER INDIA PVT LTD				Page 5
							Pages 7

© Copyright 2019 ABB. All rights reserved.

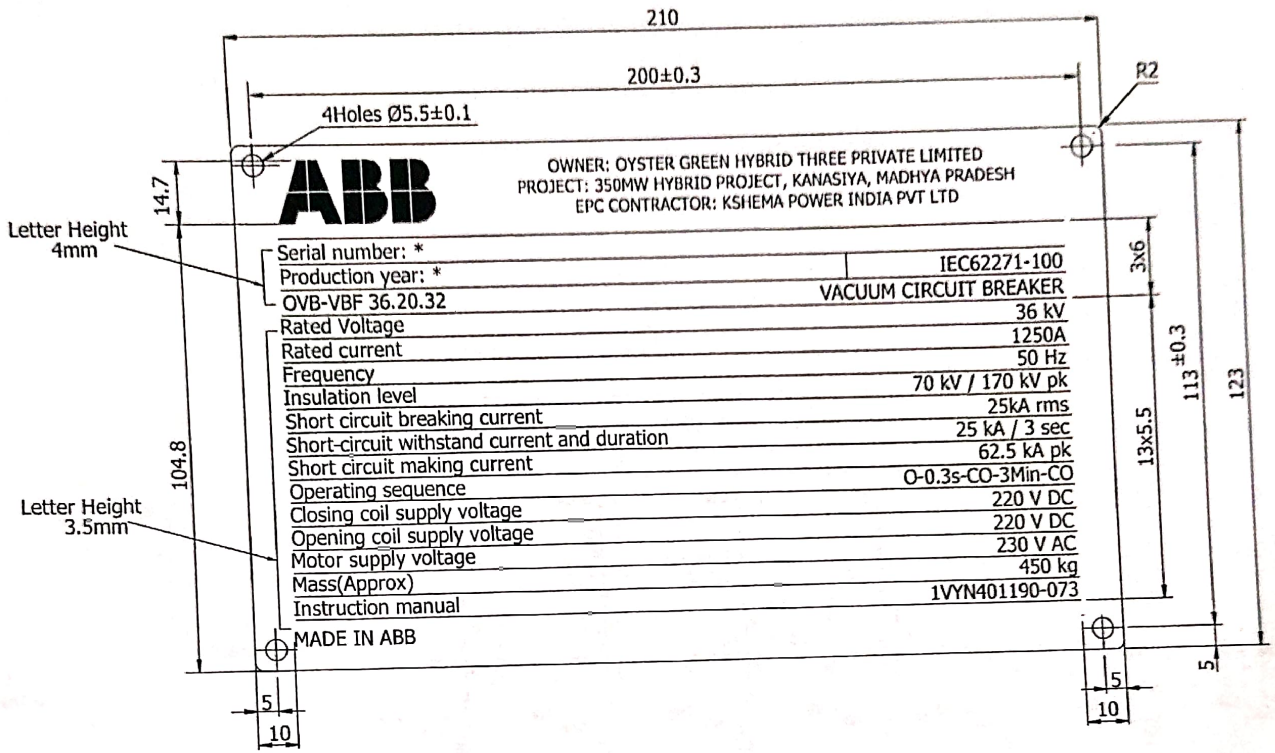

OWNER: OYSTER GREEN HYBRID THREE PRIVATE LIMITED
PROJECT: 350MW HYBRID PROJECT, KANASIYA, MADHYA PRADESH
EPC CONTRACTOR: KSHEMA POWER INDIA PVT LTD

Serial number: *	IEC62271-100
Production year: *	VACUUM CIRCUIT BREAKER
OVB-VBF 36.20.32	36 kV
Rated Voltage	1250A
Rated current	50 Hz
Frequency	70 kV / 170 kV pk
Insulation level	25kA rms
Short circuit breaking current	25 kA / 3 sec
Short-circuit withstand current and duration	62.5 kA pk
Short circuit making current	O-0.3s-CO-3Min-CO
Operating sequence	220 V DC
Closing coil supply voltage	220 V DC
Opening coil supply voltage	230 V AC
Motor supply voltage	450 kg
Mass(Approx)	1VYN401190-073
Instruction manual	

MADE IN ABB

* To be filled up by planning Dept.

Text to be photoetched (Etching depth 0.2 min.) or, laser engraved on natural background (Black colour)

ABB logo on natural background (White colour)

General Tolerance as per IN 2002 1030

Rating Plate Material: 19500-Condition O/HX4/HX8, t=0.7mm with black anodizing Al strip as per IS:737:2008

Based on

Customer: FICHTNER CONSULTING ENGINEERS (INDIA) PVT LTD

Contractor / Contract No. KSHEMA POWER INDIA PVT LTD

Project name: 350MW HYBRID PROJECT 220/33kV POOLING SUBSTATION - KANASIYA, MP

Prepared SH Date 02/04/2026
Checked VDR Approved SRM

Title: OUTDOOR VACUUM CIRCUIT BREAKER Rating Plate

ABB India Ltd., Nashik, ELDS

Order No 4203265543

Doc. No. YN1V300013-xxx


= H01 + LV


Lang.
Page 6
Pages 7

Rev. Code | Date | Name

© Copyright 2019 ABB. All rights reserved.


CB REMOTE

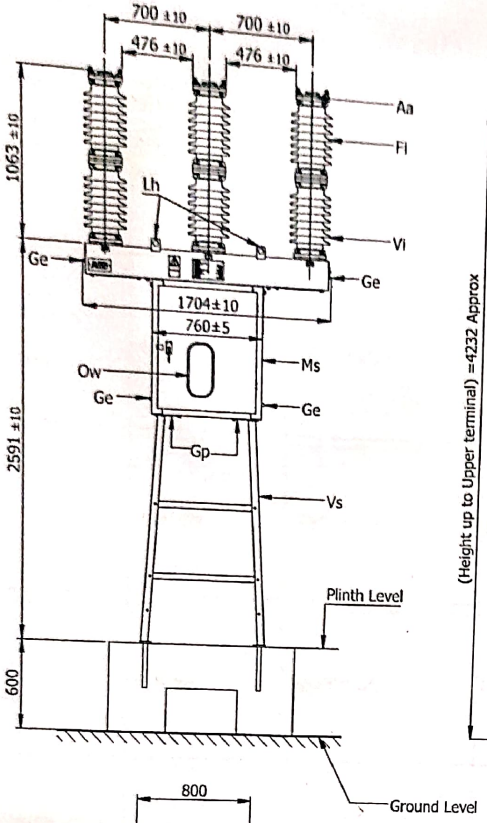


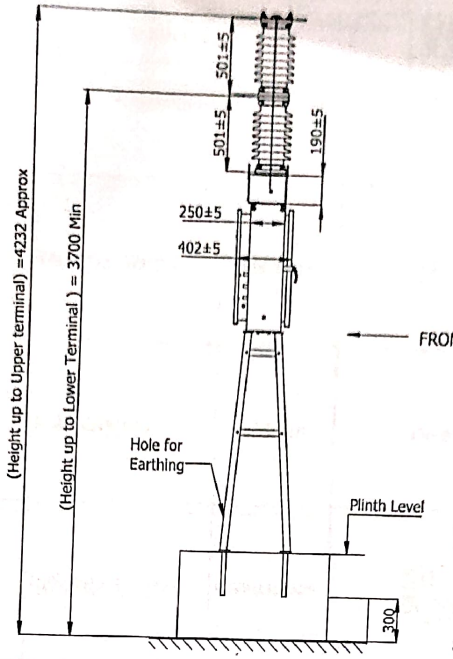


Aa Terminals (Al alloy)
Fi Interrupting Chamber
Fb Foundation bolt (M20)
Ms Control cubical with spring drive
Vi Supporting insulator column
Vs Supporting structure (Galvanise steel)
Ow Observation window (Transparent polycorbonate)
Ge Earthing point (Galvanised Bus)
Lh Hooks for lifting.
Gp Gland plate for Cable connection

Note :-
- Total mass including 3 poles, Drive and structure : 415 kg approx.
- Degree of protection : IP 55
- Thickness of cabinet - 2.5 mm ,Thickness of Door- 2.0 mm
- Width x Height of control cabinet : 760 x 874
- With Pad lock facility.
- Color of porcelain insulator : Brown.
- Make of insulator : IEC,CJI or equivalent.
- Minimum Creepage Distance of porcelain insulator : 900mm
- Paint shade of control cabinet : 631 Of IS 5 (Light Grey)
- Plinth Height : 600 mm
- Plinth is not in ABB Scope.
- Cantilever load/mechanical straight - 610kgf/(6 KN)

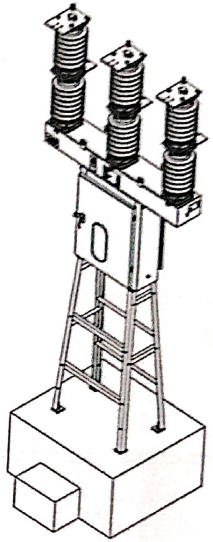


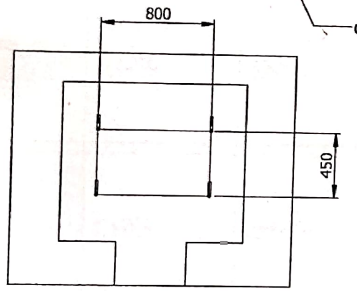

Sectional View
Foundation Plinth details



Thickness= 12mm
Aa-Terminal plate details



FOUNDATION BOLT DETAILS

Based on			Prepared SH	Date 02/04/2026	Title		Order No.	= H01
		Customer: FICHTNER CONSULTING ENGINEERS (INDIA) PVT LTD	Checked VDR	Approved SRM	OUTDOOR VACUUM CIRCUIT BREAKER GENERAL ARRANGEMENT		4203265543	+ LV
		Contractor / Contract No. KSHEMA POWER INDIA PVT LTD	Project name 350MW HYBRID PROJECT 220/33kV POOLING SUBSTATION - KANASIYA, MP		ABB India Ltd., Nashik, ELDS	Doc. No. 1YVN300013-PGA	Lang.	
Rev. Code	Date	Name					Page	7
							Pages	7

© Copyright 2019 ABB. All rights reserved.

Parts list: H01
OUTDOOR VACUUM CIRCUIT BREAKER

DEVICE TAG / FUNCTION	PAGE / POSITION	MANUFACTURER	MATERIAL ORDERING CODE	MOUNTING LOCATION	MATERIAL DESCRIPTION	Quantity
-BB1 AUXILIARY SWITCH CONTACT	+LV4/3C	SHIRKE	SY10L0274SVD9N	CABINET	Wafer Auxiliary Switch - Knife Contacts Lug type terminals with Lug & Cap Configuration - 12NO+12NC	1
-EA1 ILUMINATION LAMP	+LV2/5E	REPUTED	1VYN434059-099	CABINET	MAKE: REPUTED 7 Watt LED Lamp .	1
-SFC1 DOOR INTERLOCK SWITCH	+LV2/5C	SURAJ	1VYN452305-003	CABINET	Door Interlock Switch, Ratings:250 VAC,0.25A Range :Push to OFF,Screw Type Terminal	1
-EB1 SPACE HEATER	+LV2/6E	SWARAJ ENT.	100/240AEF	CABINET BOTTOM	SWARAJ ENTERPRISE Space Heater, 100W, 240 VAC	1
-MC CLOSE COIL	+LV3/3E	Imax	1VYN401001-TG	MECHANISM	220 VDC/VAC CLOSING/TRIPPING COIL DOMESTIC	1
-MO1 TRIP COIL-1	+LV3/5E	POWERINST	1VCR007335G0003	MECHANISM	Instantaneous coil MB01 220V DC FOR DOMESTIC BREAKERS	1

Based on

Customer:
FICHTNER CONSULTING ENGINEERS (INDIA) PVT LTD

Contractor / Contract No.
KSHEMA POWER INDIA PVT LTD

Prepared SH Date 02/04/2026
Checked VDR Approved SRM

Project name
350MW HYBRID PROJECT
220/33kV POOLING SUBSTATION - KANASIYA, MP

Title
OUTDOOR VACUUM CIRCUIT BREAKER
Parts list

ABB India Ltd., Nashik, ELDS

Order No
4203265543

Doc. No.

- H01
+ BOM

Lang.
Page Z01
Pages 4

Rev. Code | Date | Name

© Copyright 2019 ABB. All rights reserved.

Parts list: H01
OUTDOOR VACUUM CIRCUIT BREAKER

DEVICE TAG / FUNCTION	PAGE / POSITION	MANUFACTURER	MATERIAL ORDERING CODE	MOUNTING LOCATION	MATERIAL DESCRIPTION	Quantity
-MO2 TRIP COIL-2	+LV3/7E	POWERINST	1VCR005962G0003	MECHANISM	Instantaneous coil MB02 220V DC FOR DOMESTIC BREAKERS	1
-MS SPRING CHARGE MOTOR	+LV2/1C	WUXI	1VCR012079G0004	MECHANISM	230 VAC/VDC SPRING CHARGE MOTOR 200 WATT.	1
-BT1 THERMOSTAT	+LV2/6D	APT CONTROL	3WYG003378	WIRING PLATE	Thermostat,Setting: 10-90 deg.centigrade.	1
-FCM1 MCB SPRING CHARGING MOTOR	+LV2/2B	ABB	1SYS271112R0044	WIRING PLATE	MAKE:ABB ABB AC MCB SB201 M-C4 NA Aux Voltage : Suitable upto 400V AC 4A	1
-FCM1 =	+LV2/2B	ABB	2CDS200946R0001	WIRING PLATE	MAKE:ABB ABB ADD ON CONTACT S2C-H6R Add on Aux Contact 1NO+1NC (Right side)	1
-FCM2 MAIN DC MCB	+LV3/2C	ABB	1SYS252067R0104	WIRING PLATE	ABB DC MCB SB202-C10DC 2 POLE, 10A MAKE : ABB	1

Based on
Customer: FICHTNER CONSULTING ENGINEERS (INDIA) PVT LTD
Contractor / Contract No.: KSHEMA POWER INDIA PVT LTD
Rev. Code | Date | Name

Prepared SH Date 02/04/2026
Checked VDR Approved SRM
Project name: 350MW HYBRID PROJECT
220/33kV POOLING SUBSTATION - KANASIYA, MP

Title: OUTDOOR VACUUM CIRCUIT BREAKER
Parts list
ABB India Ltd., Nashik, ELDS

Order No. 4203265543
Doc. No.
= H01
+ BOM
Lang.
Page Z02
Pages 4

© Copyright 2019 ABB. All rights reserved.

Parts list: H01
OUTDOOR VACUUM CIRCUIT BREAKER

DEVICE TAG / FUNCTION	PAGE / POSITION	MANUFACTURER	MATERIAL ORDERING CODE	MOUNTING LOCATION	MATERIAL DESCRIPTION	Quantity
-FCM2 MAIN DC MCB	+LV3/2C	ABB	2CDS200946R0001	WIRING PLATE	MAKE:ABB ABB ADD ON CONTACT S2C-H6R Add on Aux Contact 1NO+1NC (Right side)	1
-FCM3 MCB MAIN AC	+LV2/6B	ABB	1SYS271112R0104	WIRING PLATE	MAKE:ABB ABB AC MCB SB201 M-C10 NA Aux Voltage : Suitable upto 400V AC 10A	1
-FCM3 =	+LV2/6B	ABB	2CDS200946R0001	WIRING PLATE	MAKE:ABB ABB ADD ON CONTACT S2C-H6R Add on Aux Contact 1NO+1NC (Right side)	1
-KFN1 ANTIPUMPING RELAY	+LV3/4E	ABB-PEENYA	1SVR405613R9000	WIRING PLATE	CR-M4SS With Base For Contacts:4C/O SR Plug-in Relay, Aux.Voltage:220V DC,	1
-SFC6 HEATER TOGGLE SWITCH	+LV2/6C	SWITRON	1VYN452150-362	WIRING PLATE	MAKE:SWITRON/ SURAJ, Toggle Switch,10A,240V AC.	1
-SFC7 3 PIN SOCKET TOGGLE SWITCH	+LV2/7C	SWITRON	1VYN452150-362	WIRING PLATE	MAKE:SWITRON/ SURAJ, Toggle Switch,10A,240V AC.	1

Based on

Rev. Code	Date	Name

Customer: FICHTNER CONSULTING ENGINEERS (INDIA) PVT LTD
Contractor / Contract No. KSHEMA POWER INDIA PVT LTD

Prepared SH Date 02/04/2026
Checked VDR Approved SRM
Project name 350MW HYBRID PROJECT
220/33kV POOLING SUBSTATION - KANASIYA, MP

Title OUTDOOR VACUUM CIRCUIT BREAKER
Parts list
ABB India Ltd., Nashik, ELDS

Order No 4203265543
Doc. No.

= H01
+ BOM
Lang.
Page 203
Pages 4

© Copyright 2019 ABB. All rights reserved.

Parts list: H01
OUTDOOR VACUUM CIRCUIT BREAKER

DEVICE TAG / FUNCTION	PAGE / POSITION	MANUFACTURER	MATERIAL ORDERING CODE	MOUNTING LOCATION	MATERIAL DESCRIPTION	Quantity
-SFS1 TNC SELECTOR SWITCH	+LV4/2A	SHIRKE	SC32B0204UBS3P	WIRING PLATE	Type : Breaker Control Switch,TNC. Configuration : 2 Pole 3 Position; 32A. (2 Contacts to Close in each position) (45°+45°) Legent Plate Size - 75mm x 75mm Position Lable - TRIP-NEUTRAL-CLOSE Handle - Pistol Grip Non-Lockable.	1
-SFS3 L/R SELECTOR SWITCH	+LV4/5A	SHIRKE	SC32D0258UBA9K	WIRING PLATE	Type : Local Remote Switch (4 Contacts to Close in each position) Configuration : 4 Pole 2 Position; 32A, 90 Deg. Legent Plate Size - 75mm x 75mm Position Lable - LOCAL-REMOTE Handle - WING Non- Lockable Catagory - AC21A : 690 VAC; AC23A : 440 VAC", 4L+4R	1
-XDS1 POWER SUPPLY 3PIN SOCKET	+LV2/7E	ABB	1SYN880690R0001	WIRING PLATE	06A, 240VAC, 3-PIN SOCKET	1

Based on			Prepared SH	Date 02/04/2026	Title OUTDOOR VACUUM CIRCUIT BREAKER	Order No 4203265543	= H01
		Customer: FICHTNER CONSULTING ENGINEERS (INDIA) Pvt. Ltd.	Checked VDR	Approved SRM			+ BOM
			Project name		Parts list	Doc. No.	Lang.
		Contractor / Contract No. KSHEMA POWER INDIA PVT LTD	350MW HYBRID PROJECT 220/33kV POOLING SUBSTATION - KANASIYA, MP		ABB India Ltd., Nashik, ELDS		Page 204
Rev. Code	Date	Name					Pages 4

TERMINALS -XDB

BREAKER INTERNAL TERMINAL

TOTAL TERMINALS COUNT: 67 PCS

TERMINAL TYPE:

DEVICE PIN	DEVICE DESIGNATION	POTENTIAL/ COLOR		PAGE
138	BREAKER SPARE CONTACT	U19	GY	5/5A
139	=	U20	GY	5/5B
140	=	U21	GY	5/5C
141	=	U22	GY	5/5D
142	=	U23	BK	5/5E
143	=	U24	BK	5/5E
144	=	U25	GY	5/5A
145	=	U26	GY	5/5B
146	=	U27	GY	5/5C
147	=	U28	GY	5/5D
148	=	U29	BK	5/6C
149	=	U30	BK	5/6D
150	=	U31	BK	5/6A
151	=	U32	BK	5/6B
152	=	U33	BK	5/6C
153	=	U34	BK	5/7D
154	=	U35	BK	5/7A
155	=	U36	BK	5/7B
156	SPRNG CHRG RELAY SPARE	U37	BK	5/7D
157	=	U38	BK	5/7F
158	BREAKER SPARE CONTACT	U39	BK	5/7C
159	=	U40	BK	5/7D
160	=	U41	BK	5/7A
161	=	U42	BK	5/7B
162	SPRNG CHRG RELAY SPARE	U43	BK	5/8F
163	=	U44	BK	5/8D
164	BREAKER SPARE CONTACT	U45	BK	5/8C
165	=	U46	BK	5/8D
166	=	U47	BK	5/8A
167	=	U48	BK	5/8B
168	=	K2	BK	5/8B

DEVICE PIN	DEVICE DESIGNATION	PAGE
27	-BB1	5/5A
28	-BB1	5/5B
25	-BB1	5/5C
26	-BB1	5/5D
13	-FCM2	5/5E
14	-FCM2	5/5E
31	-BB1	5/5A
32	-BB1	5/5B
29	-BB1	5/5C
30	-BB1	5/5D
33	-BB1	5/6C
34	-BB1	5/6D
35	-BB1	5/6A
36	-BB1	5/6B
37	-BB1	5/7C
38	-BB1	5/7D
39	-BB1	5/7A
40	-BB1	5/7B
13	-SFS3	5/7D
14	-SFS3	5/7F
41	-BB1	5/7C
42	-BB1	5/7D
43	-BB1	5/7A
44	-BB1	5/7B
15	-SFS3	5/8D
16	-SFS3	5/8F
45	-BB1	5/8C
46	-BB1	5/8D
47	-BB1	5/8A
48	-BB1	5/8B
48	-BB1	5/8B

DEVICE PIN	DEVICE DESIGNATION

TERMINALS -XDB

BREAKER INTERNAL TERMINAL

TOTAL TERMINALS COUNT: 67 PCS

TERMINAL TYPE:

PAGE	DEVICE DESIGNATION	DEVICE PIN	POTENTIAL/ COLOR		DEVICE PIN	DEVICE DESIGNATION
2/2A	-FCM1	1	H1 BK	101		
2/3A	-FCM1	3	H2 BK	102		
2/6A	-FCM3	1	H3 BK	103		
2/6A	-FCM3	3	H4 BK	104		
3/1C	-FCM2	2	J1 GY	105		
3/1C	-FCM2	4	J2 GY	106		
3/3B	-SFS3	2	K3 GY	107		
3/3B	-SFS1	3	K3A GY	108		
3/3C	-BB1	11	K5 GY	109	9	-KFN1
3/4B	-SFS3	4	K9 GY	110		
3/4B	-SFS1	4	K4 GY	111		
3/5C	-BB1	1	K11 GY	112	2	-SFS1
3/6C	-BB1	3	K13 GY	113		
3/6B	-SFS3	8	K14 GY	114		
3/6B	-SFS1	2	K11 GY	115		
3/7C	-BB1	5	K16 GY	116	6	-SFS1
3/8C	-BB1	7	K18 GY	117		
3/8B	-SFS3	12	K19 GY	118		
3/8B	-SFS1	6	K16 GY	119		
5/1B	-BS1	5	U1 GY	120	BREAKER SPARE CONTACT	
5/1C	-BS1	6	U2 GY	121	=	
5/2A	-BB1	15	U3 GY	122	=	
5/2B	-BB1	16	U4 GY	123	=	
5/2C	-BB1	9	U5 GY	124	=	
5/2D	-BB1	10	U6 GY	125	=	
5/4A	-BB1	19	U7 GY	126	=	
5/4B	-BB1	20	U8 GY	127	=	
5/4C	-BB1	17	U9 GY	128	=	
5/4D	-BB1	18	U10 GY	129	=	
5/4E	-FCN1	13	U11 BK	130	=	
5/4E	-FCN1	14	U12 BK	131	=	
5/4A	-BB1	23	U13 GY	132	=	
5/4B	-BB1	24	U14 GY	133	=	
5/4C	-BB1	21	U15 GY	134	=	
5/4D	-BB1	22	U16 GY	135	=	
5/4E	-FCN3	13	U17 BK	136	=	
5/4E	-FCN3	14	U18 BK	137	=	

© Copyright 2019 ABB. All rights reserved.

Based on

Rev. Code	Date	Name	Customer:
			FICHTNER CONSULTING ENGINEERS (INDIA) PVT LTD
			Contractor / Contract No.
			KSHEMA POWER INDIA PVT LTD

Prepared SH Date 02/04/2026
Checked VDR Approved SRM
Project name
350MW HYBRID PROJECT
220/33kV POOLING SUBSTATION - KANASIVA, MP

Title
OUTDOOR VACUUM CIRCUIT BREAKER
TERMINALS =H01+LV-XDB

ABB India Ltd., Nashik, ELDS

Order No
4203265543
= H01
+ TBPLAN

Doc. No.

Lang.
Page 205
Pages 2